


PROSOUD/1

HEAT LINE

HEAT PROTECTION 100°C

- Metal, glass, energy, plastic
- Welding and boiler making, sheet metal work, production operations, handling of strapping and mesh
- Handling of hot and sharp parts

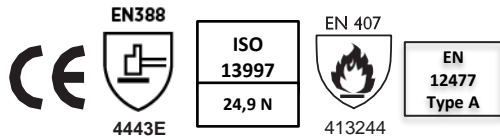

ISO 13997	A	B	C	D	E	F
Cutting load in Newtons	≥ 2	≥ 5	≥ 10	≥ 15	≥ 22	≥ 30

AET N°0075/011/162/10/18/2328 (CTC LYON)

STANDARDS (DETAILS ON WEB SITE)
www.rostaing.com/normes-securite

SIZES



COMPOSITION

Palm Oil-proofed and water-proofed cow split leather
Back Cow split leather
Lining Para-aramid/cotton/mineral fibres/polyester knitted glove
Cuff Heat treated leather
Total length 40 cm

CARE



PACKAGING

Bag of 5 pairs - Box of 25 pairs

PRO•ONE:

Available by hand



High resistance to molten metal spray



Forearm protection
 Cuff length 15 cm



Heat resistance

Thermal insulation:
 100°C for 15 seconds
 minimum and 250°C for
10 seconds

Oil-proofed and
 water-proofed leather



**Very good
 cut resistance**

Para-aramid/cotton/mineral
 fibres/polyester technical
 lining