

RESCUEFLUO-SC


FIRE-FIGHTER PRODUCT LINE

EXTRICATION

- Traffic accident rescue
- Vehicle extrication
- Rescue / clean-up

Abrasion protection level
on the back: **3**

ISO 13997
Palm 32,1N Back 28,2 N

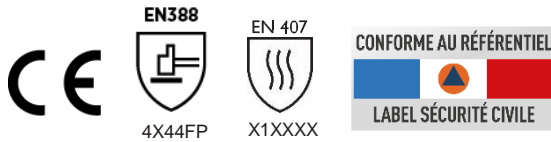

AET N°0075/011/162/03/20/0725 (CTC LYON)

STANDARDS (DETAILS ON WEB SITE)
www.rostaing.com/normes-securite

SIZES



COMPOSITION

Palm Polyurethane coating, cow split leather reinforcement + foamback protection
Back Shock absorbing thermoplastic reinforcements
Glove HPPE/mineral fibres weave
Total length 25 cm

CARE



PACKAGING

Bag of 1 pair - Box of 50 pairs



Standard shock protection



Heat resistance

Thermal insulation:
250°C for 10 seconds
minimum



Maximum cut resistance

Technological weave



Very good perforation resistance

On the reinforced areas



Wrist adjustment system

Better glove fit

Optimised shock protection

