


RIPDEX

PERFORAZOR LINE

HANDLING OF BARBED WIRES

- Handling of sharped barbed wires, perimeter security
- Safety
- Metal and Glass works

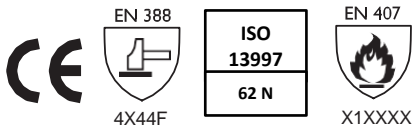

ISO 13997	A	B	C	D	E	F
Cutting load in Newtons	≥ 2	≥ 5	≥ 10	≥ 15	≥ 22	≥ 30

AET N° 0075/011/162/01/20/0083 (CTC LYON)

STANDARDS (DETAILS ON WEB SITE)
www.rostaing.com/normes-securite

SIZES



COMPOSITION

Cuff Oil resistant & water resistant cow split leather
Lining Stainless steel, HPPE, polyamide weave
Total length 50 cm

CARE



PACKAGING

Bag of 5 pairs – Box of 20 pairs


Maximum cut protection
 Technological weave



Perforation resistance
 Cow split leather



Contact heat resistance

Thermal insulation :
 100 °C for 15 seconds minimum

Oil-proofed and water-proofed leather

Kevlar reinforced seams



RANGE
PERFORAZOR